



More Productive
More competitive
Enhanced ROI



WELDING ROTATOR

BOLT TYPE
SELF-CENTERING
SELF ALLIGNED



Key Features



High quality
Gear Reducers



Precision
Machined Surface



Heavy duty
Metal Body to
Enhance Durability



Metal Body
Remote Control



Reputed make
Control Elements
& Switchgears



SGI Gasting for
Bearing Housing
to Ensure Safety

UNLOCKING
INNOVATION




- PTMEG PU RUBBER
- 90 SHORE A HARDNESS
- 15 MM PU THICKNESS
- HEAVY DUTY METAL ROLLER

Self Centering Rotator (Screw Type)



MODEL		CR-2	CR-5	CR-10	CR-20	CR-30	CR-40
RATED LOAD (Ton)		2	5	10	20	30	40
MIN JOB DIAMETER	A	200	250	320	500	550	600
MAX JOB DIAMETER	B	1800	2300	2800	3500	3800	4200
PU ROLLER OD	C	200	250	300	350	350	400
PU ROLLER WIDTH	D	80	100	120	120	130	140
METALIC ROLLER OD	E	170	220	270	320	320	370
LINEAR SPEED (mm/min)		100 -1000					
SPEED CONTROL		VFD					
MOTOR POWER (kw)		2x0.25	2x0.37	2x0.55	2x1.1	2x1.1	2x1.5
FRAME LENGTH	F	1420	1670	2050	2600	2720	3030
POWER WIDTH	G	390	500	555	585	640	640
IDLER WIDTH	H	310	340	400	420	460	480
TOTAL HEIGHT	I	365	445	515	610	625	655
BODY HEIGHT	J	118	147	147	175	175	179
CENTER DISTANCE OF ROLLER	K	225-1030	285-1300	310-1550	425-1925	450-2075	500-2300

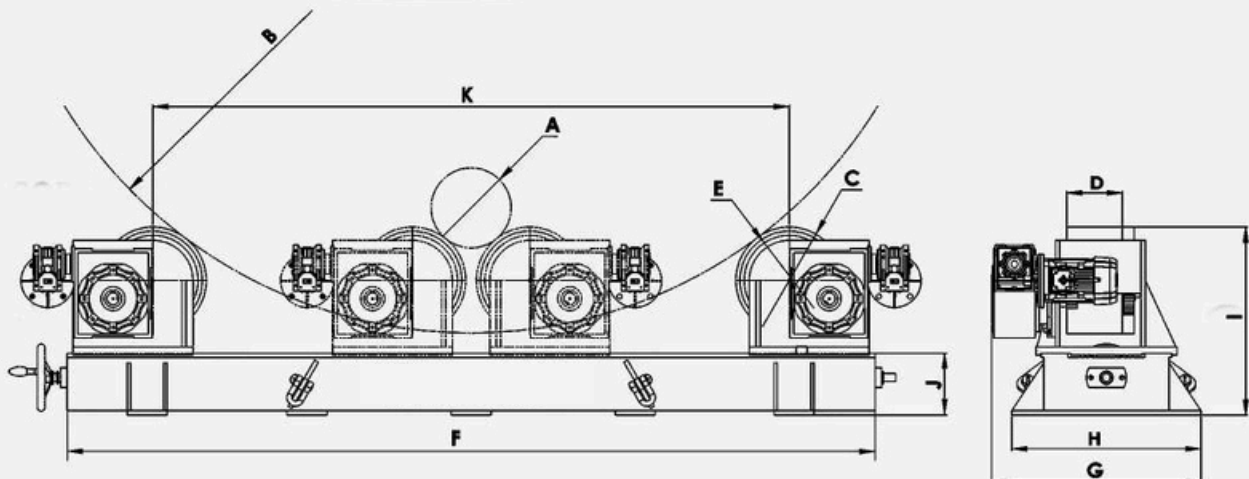

HEALTHY
WELD JOINT LEADS
SAFE HUMANITY



Email: info@crossmarketing.co.in

Phone Number: (+91) 9163763419 | (+91) 9038320189

Head Office: Marn Burn Business Park | Suite No 900A
| Block- BP | Salt Lake | Sector - V | Kolkata - 700091 |
West Bengal | India